




GE INDUSTRIAL MOTORS  
a WOLONG company

# Fire Pump Motors

**Industrial Grade Reliability**

145-5013 Frame

1-450 HP, 460V, 575V, 600V

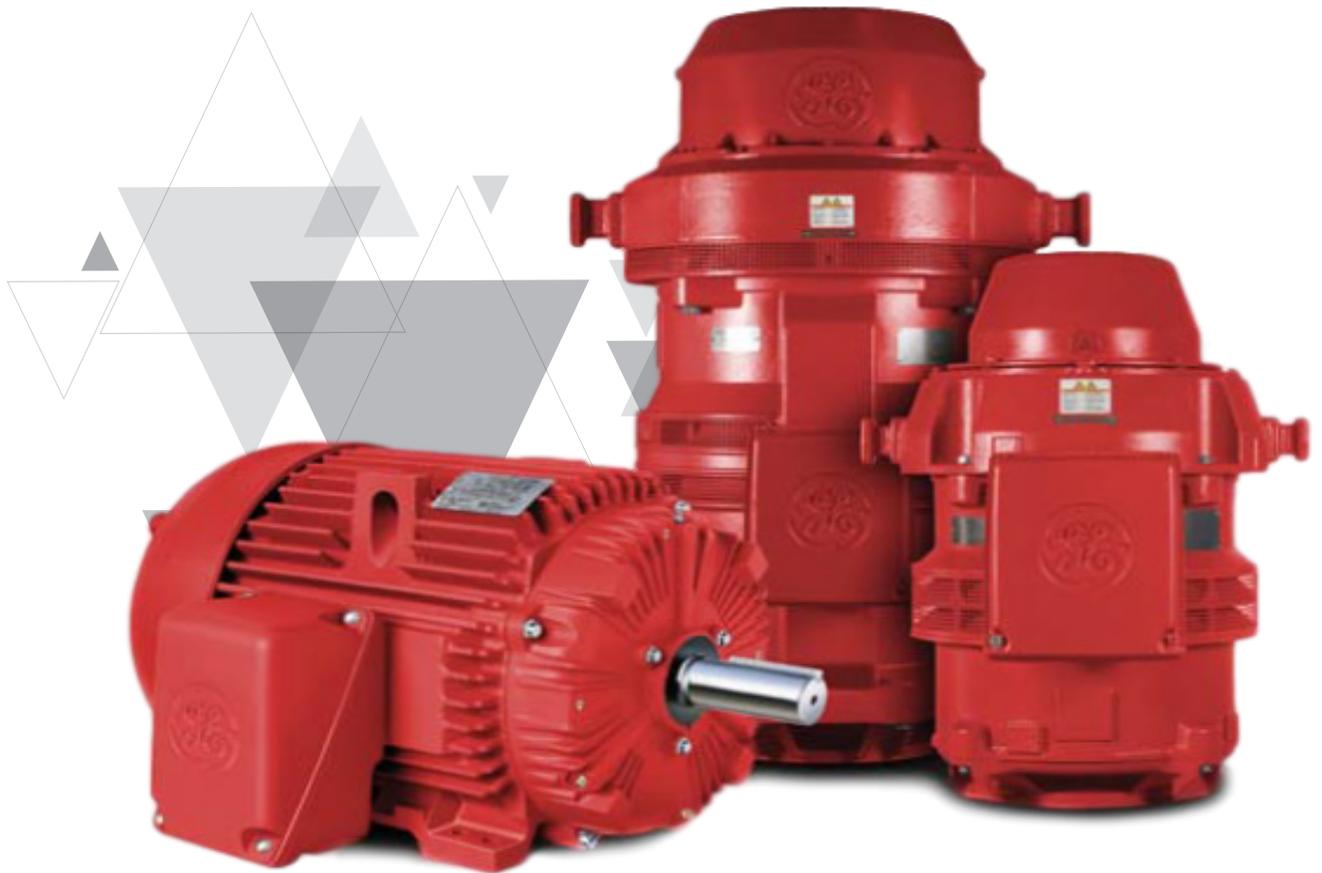

+1 (888) 525-2915  
[www.gemotorswolong.com](http://www.gemotorswolong.com)

# All fire pump motors are not built the same.

---

## Durable and Reliable Technology

### Fully certified.

GE is authorized to manufacture fire pump motors per UL File E47088, Vol. 9, Sec. 1 (under Fire Pump QXZF and Inverter Duty PRHJ). A stainless steel embossed

### Guarding against corrosion.

Fire pump motors sit dormant for many months of the year and may be subject to temperature and barometric changes, especially with outdoor applications. This environment causes condensation to collect on metal surfaces promoting corrosion and leading to unexpected failures. Optional space heaters can be wrapped around the winding coils. They work like an electric blanket transferring a small electric current into heat to keep the motor warm, dry and ready to start when operators need them most.

### Key Features

**Comprehensive five year warranty (60/66 months) is standard.** Extended AEGIS™ SGR bearing guarantee on motors up to and including 100HP: 15 yrs or 130k hrs direct drive; 10yrs or 80k hrs belted drive.

ISO 1940 Grade 1.0 Precision Plus balance to 0.04 in/sec results in smooth, reliable operation and long bearing life.

Built for a long 130,000 hour L10 direct connected and 50,000 hour L10a belted bearing life without life adjusting factors.

Complete Test per MG1 Part 12 IEEE Standard 112 and Corona Inception Voltage (CIV). Verification of compliance and routine test report supplied with every ASD Ultra motor.

ASD Ultra motors can be UL listed, CSA listed, or GE self certified for Division 2 locations or modified to meet ATEX Zone 2 or CE requirements.

### GEGARD™ Insulation offers added protection

The Class H GEGARD insulation system is the result of insights gained in over 100 years of GE motor development in satisfying the electrical and mechanical needs of operators. It is designed to excel in severe environments and challenging applications where lesser designs often short circuit and cause overcurrent trips.

### Rotational Varnish Application

Motor coils are rotationally varnished with a “Trickle Treat” process while an electric current is passed through the windings to ensure a penetrating, thorough and even coating. This proven process fills air gaps that could cause corona inception damage during operation.

### Strong Bond

Resin penetrates deep into tightly packed coil wire creating a strong bond that guards against end-turn vibration.

### High Protection

Contaminants can't penetrate carefully and tightly packed stator coils bonded by deep resin penetration into the slots.



# Extensive Product Offering

## 50 and 60 Hz. for horizontal and vertical configurations

### Applications

Specially designed for industrial and commercial pumping applications

- Horizontal Fire Pumps
- In-Line Fire Pumps
- End Suction Fire Pumps
- Vertical Fire Pumps

### Standard Features

2, 4, 6 and 8 Pole Designs  
 VFD Capable  
 Cast iron frames  
 TEFC, TENV, ODP, WPI Enclosures  
 Cast iron bearing cap w/ recessed slinger  
 Ball bearings  
 1.15 Service Factor limited by UL1004-5  
 Class H insulation  
 Class B temperature rise (80°C)  
 Continuous Duty (S1)  
 104°F (40°C) ambient temperature  
 3300ft (1000m) altitude  
 Stainless steel nameplates

### Applications

Special voltages  
 Specially designed shaft  
 Space heaters  
 Thermistor, thermostats, or  
 RTD's  
 Roller Bearings  
 Shaft grounding rings

A Frame	Frame	TEFC / TENV				P / WPI			
		3600	1800	1200	900	3600	1800	1200	900
143/145	90S/90L	2	2	1	1	3	2	1	1
182/184	112S/122M	5	5	2	1.5	7.5	5	2	1.5
213/215	132S/132M	10	10	5	3	15	10	5	3
254/256	160M/160L	20	20	10	7.5	25	20	10	7.5
284/286	180M/180L	30	30	20	15	40	30	20	15
324/326	200M/200L	50	50	30	25	60	50	30	25
364/365	225S/225M	75	75	50	40	100	75	50	40
404/405	250S/250M	100	100	75	60	150	125	75	60
444/445	280S/280M	150	150	125	100	250	250	150	100
447/449	280K/280H	300	300	250	200	450	450	300	250

50 Hz. Maximum Power in HP		Speed (RPM)							
NEMA Frame	IEC Frame	TEFC / TENV				ODP / WPI			
		3000	1500	1000	750	3000	1500	1000	750
143/145	90S/90L	2	1.5	1	1	3	2	1	1
182/184	112S/122M	5	5	3	1.5	7.5	5	2	1.5
213/215	132S/132M	10	10	7.5	3	15	10	5	3
254/256	160M/160L	25	20	15	10	25	20	10	7.5
284/286	180M/180L	30	30	20	15	40	30	20	15
324/326	200M/200L	50	50	30	20	60	50	30	25
364/365	225S/225M	75	75	40	30	100	75	50	40
404/405	250S/250M	100	100	50	50	150	125	75	60
444/445	280S/280M	150	150	100	100	250	250	150	100
447/449	280K/280H	300	300	225	150	450	450	300	250
509/5011/5013	315H/315F/315D	450	450	450	450	450	450	450	450

# Catalog Models

Vertical Hollow Shaft WPI Enclosure Standard Models												
HP	RPM	Hz	V	Model	Catalog #	Frame	Base Dia (in)	List w/NRR	Wgt(lbs)	CD dim (in)	Down Thrust (lbs)	
15	1800	60	230/460	5KE254DAE6020	VF101	L254TP10	10	\$ 3,115	266	23.38	2575	
20	1800	60	230/460	5KE256DAE6020	VF102	L256TP12	12	\$ 3,380	299	23.38	2575	
25	1800	60	230/460	5KE284DAE6020	VF103	L284TP16	16.5	\$ 3,868	399	24.75	2960	
30	1800	60	230/460	5KE286DAE6020	VF104	L286TP16	16.5	\$ 4,124	447	24.75	2960	
40	1800	60	230/460	5KE324DAE6020	VF105	L324TP16	16.5	\$ 5,103	703	28.22	5700	
50	1800	60	230/460	5KE326DAE6020	VF106	L326TP16	16.5	\$ 5,750	741	28.22	5700	
60	1800	60	460 PWS	5KE364DAE6020	VF107	L364TP16	16.5	\$ 7,009	865	31.16	5700	
75	1800	60	460 PWS	5KE365DAE6020	VF108	L365TP16	16.5	\$ 7,978	903	31.16	5700	
100	1800	60	460 PWS	5KE404DAE6020	VF109	L404TP16	16.5	\$ 10,148	1311	36.94	6700	
125	1800	60	460 PWS	5KE405DAE6020	VF110	L405TP16	16.5	\$ 12,145	1368	36.94	6700	
150	1800	60	460 PWS	5KE444DAE6020	VF111	L444TP16	16.5	\$ 15,801	2246	44.78	13500	
200	1800	60	460 PWS	5KE444DAE6021	VF112	L444TP16	16.5	\$ 19,662	2348	44.78	13500	
250	1800	60	460 PWS	5KE445DAE6021	VF113	L445TP16	16.5	\$ 24,151	2417	44.78	13500	
300	1800	60	460 PWS	5KE447DAE6020	VF114	L447TP16	20	\$ 28,039	2725	49.78	13300	
350	1800	60	460 PWS	5KE447DAE6021	VF115	L447TP16	20	\$ 32,306	2947	49.78	13300	
400	1800	60	460 PWS	5KE449DAE6021	VF116	L449TP16	20	\$ 35,283	3169	49.78	13300	
450	1800	60	460 PWS	5KE449DAE6022	VF117	L449TP16	20	\$ 41,236	3186	49.78	13300	

## SERVICES CARING FOR YOUR NEEDS

At GE, we understand that the goals of your organization are demanding, and evolving. To help you meet these goals here at GE Industrial Motors by Wolong we provide a service that goes beyond just waiting for your call.

We offer a comprehensive range of aftermarket services including replacement units, field services spares, service agreements, unit upgrades and technical support. Our mission is to satisfy our customers aftermarket needs.



**GE INDUSTRIAL MOTORS**  
a **WOLONG** company



[www.gemotorswolong.com](http://www.gemotorswolong.com)

XSD Ultra®, GEGARD2400™, and Six Star Bearing System™ are trademarks of General Electric Company. © 2012 General Electric Company. All rights reserved.  
GEA18014B (6/2020)